


# Perfect Vento

Un fresco soffio  
di VENTO

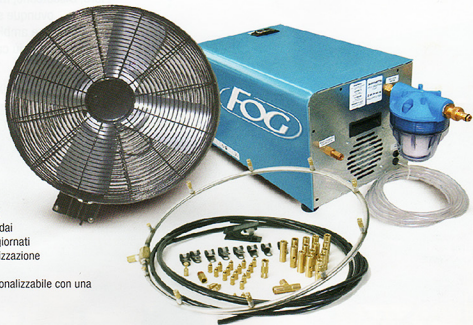

Perfect Cool presenta la soluzione adottata dai locali pubblici più aggiornati per la migliore climatizzazione in interni ed esterni. Perfect VENTO è personalizzabile con una gamma di accessori per ogni necessità.

## ○ Potente ed efficace

Perfect VENTO è la soluzione più potente ed efficiente per l'abbattimento della temperatura. L'acqua micronizzata viene spinta da 'Mist Fan', appositamente progettati, che garantiscono un veloce ricambio d'aria ed un eccezionale abbassamento della temperatura.

## ○ Molteplici applicazioni

Perfect VENTO può essere utilizzato sia all'aperto che in ambienti chiusi come magazzini, fabbriche, stand fieristici, manifestazioni, bar, discoteche, piazze, parchi tematici ecc..



# Perfect Vento



ANTI-DRIP  
SYSTEM  
PERFECT  
ELECTRONIC

## Perfect Vento Pro



description	FOG PRO 1l/min, 60bar, 0,8Kw 230V 50Hz	FOG PRO 2l/min, 60bar, 0,9Kw 230V 50Hz	MIST FAN ø60 cm. Oscillating. Complete with wall mounting bracket	BRASS NOZZLE 0,15 with anti-drip check valve thread 10/24UNC/2A	MIST RING made of steel for 6 nozzles	TEE QUICK COUPLING made of brass	POLYAMIDE PIPE for high pressure ø9,5x5 mm, in meters	RUBBERIZED SS CLAMP for fixing polyamide pipe ø9,5 mm
<b>Kit vento 602</b> cod. PC.KV602	1		2	12	2	1	25	20
<b>Kit vento 604</b> cod. PC.KV604	1		4	24	4	3	50	40
<b>Kit vento 606</b> cod. PC.KV606		1	6	36	6	5	75	65

## High technology for the best efficacy

ANTI-DRIP  
SYSTEM  
PERFECT  
ELECTRONIC

## Perfect Vento Eco



description	FOG ECO 1 1l/min, 70 bar, 200 watt, 230V 50 Hz	MIST FAN ø63 cm. Oscillating. Complete with wall mounting bracket	MIST RING made of steel for 4 nozzles	BRASS NOZZLE 0,15 with anti-drip check valve thread 10/24UNC/2A	TEE QUICK COUPLING made of brass	POLYAMIDE PIPE for high pressure, ø9,5x5 mm, in meters	RUBBERIZED SS CLAMP for fixing polyamide pipe ø9,5 mm
<b>Kit vento Eco 202</b> cod. PC.KW202	1	2	2	8	1	25	20
<b>Kit vento Eco 402</b> cod. PC.KW402	1	4	4	16	3	50	40

## Characteristics

Perfect VENTO kits are completely supplied with all accessories required for installation. Our FOG MODULES are made with selected components specifically designed for fogging systems, featuring extremely sophisticated and innovative systems like:

### FOG PRO MODULE

- 1450 Rpm axial motor-pump, 230V-50Hz, 3 piston with terminal part inceramic and brass head
- Unloader valve
- Solenoid valve 230V-50Hz, low pressure inlet water
- Solenoid valve 230V-50Hz, high pressure to unload the h.p. line

### FOG ECO MODULE

- Integrated duty cycle.
- Nozzle anti-drip check valve system.
- Motor-pump, 230V 50 Hz, 200Watt.
- Integrated water filter.
- L.p. pressure switch for lack of water.

- Pressure switch in low pressure for lack of water
- Electric board complete with: ON/OFF thermal switch, remote control switch and timer to relay h.p. solenoid valve. It is ready to be connected to an external device.

## Accessories

### IT.0103 DUTY CYCLE REMOTE CONTROL - PERFECT TIME:

The remote control FOG PERFECT TIME works at 230 V 50 Hz and enables you to set the required duty cycle. The display will show it. It is easy to program, even by not skilled people. It can also be used as an ON/OFF switch.

### IT.0105 REMOTE CONTROL HUMIDISTAT - PERFECT COOL:

The remote control for fogging systems PERFECT COOL is ideal to control and keep the degree of humidity you wish in a closed area.